Atomic50

Applications

Ideal for applications such as office spaces, lobby areas, restaurants, retail stores, and private residences.
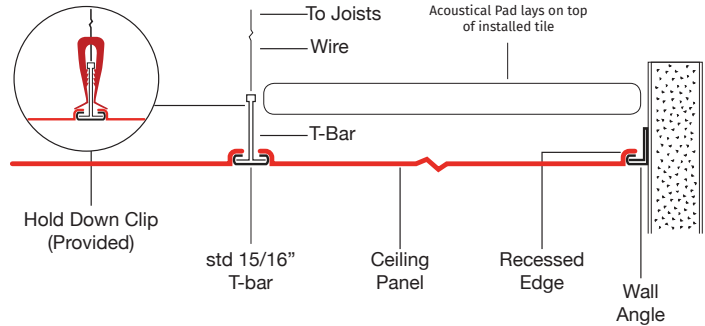
Features & Benefits

- Material: T1 grade tin-plated steel
- Size: 24" x 24"
- Thickness: 0.010"
- TYP Hole Size: 0.026" (0.66mm)
- Distance: 0.207" on straight centers
- NRC: 0.25 tile only, 0.85 tile backed with Acoustical Pad
- Tolerance: +/- ¹⁄₆₄" on length and width
- Fire Rating: ASTM E 84-03b
- Patterns: Over 30 patterns
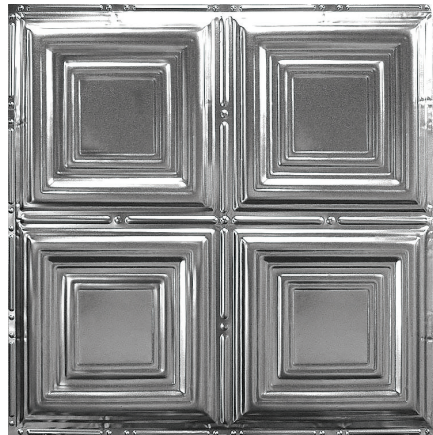- Colors: Over 50 colors
- Made in USA

Installation

- Sits flush in grid system.
- Fits standard ¹⁵⁄₁₆" grid system on 24" centers.
- Panels also available for ⁹⁄₁₆" grid system on 24" centers.
- Cross tees are available to convert 2' x 4' grid systems.
- Simply paint suspended grid system to match tile color.
- Our proprietary Drop-In Clips secure your tiles in place.
- For international orders: also available in metric version. These fit standard 24mm grid system on 600mm centers.
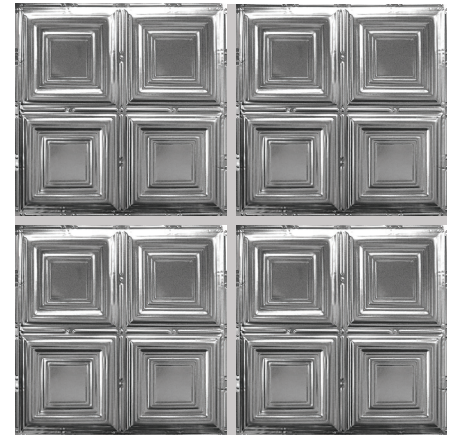
Cross Section View:

To Joists
Wire
Acoustical Pad lays on top of installed tile
T-Bar
Hold Down Clip (Provided)
std 15/16" T-bar
Ceiling Panel
Recessed Edge
Wall Angle

Single Panel View:
(2' x 2')

Multiple Panel View:
(4' x 4')

Available Patterns (AT50-):

02	03	04	05	08	09	10	13	15	16
17	19	20	21	22	23	24	26	28	30
34	35	36	37	38	39				