

Applications

Ideal for applications such as hotels, bars, restaurants, casinos, office spaces, retail stores, lobby areas, and private residences.


Features & Benefits

- Material: T1 grade tin-plated steel
- Size: 24" x 24"
- Thickness: 0.010"
- TYP Hole Size: 0.026" (0.66mm)
- Distance: 0.207" on straight centers
- NRC: 0.25 tile only, 0.85 tile backed with Acoustical Pad
- Tolerance: +/- 1/64" on length and width
- Fire Rating: ASTM E 84-03b
- Patterns: Over 30 patterns
- Colors: Over 50 colors
- Made in USA


Installation

- Used on wood substrate.
- Requires wood grid on 24" centers in both directions to provide space for acoustical pads. A 2" x 4" wood stud grid will be sufficient.
- Requires plywood, furring strips, or joists.
- Each panel contains a 3/8" nail rail that overlaps tight seams.
- Install by hand nailing, using Cone Head Nails that we sell.
- Install by Brad Nailer, using 18-gauge brad nails. (25 PSI)

Wood Grid System View:

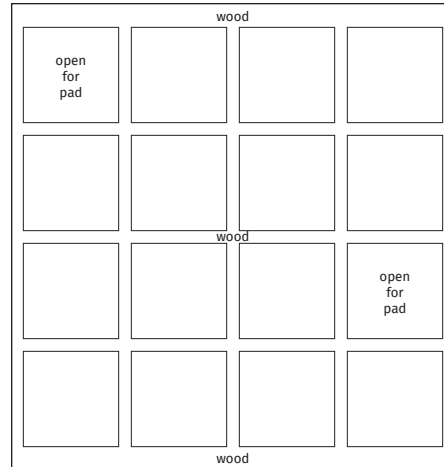


Cross Section View:




Single Panel View:

(2' x 2')

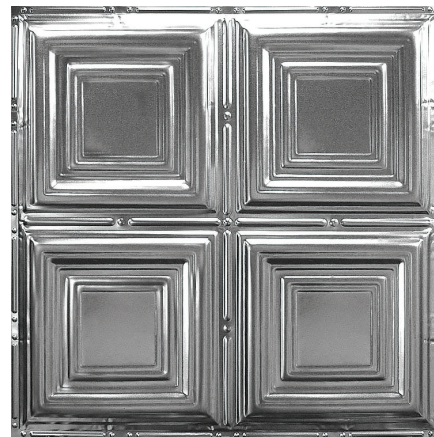

Multiple Panel View:

(4' x 4')

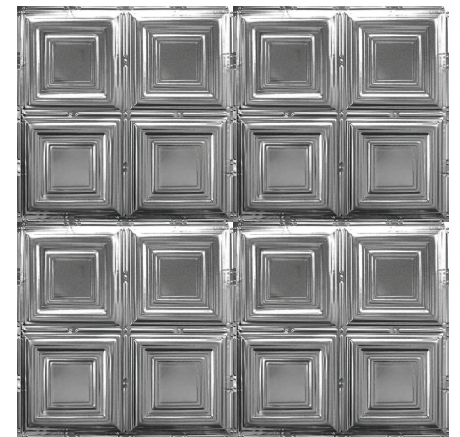

Available Patterns (AT50-):

02	03	04	05	08	09	10	13	15	16
17	19	20	21	22	23	24	26	28	30
32	34	35	36	37	38	39			